

# RG-EW1200 1200Mbps Dual-band Gigabit Wireless Router

**DATASHEET** 




#### 🖊 Highlights

- Support 802.11ac wave2
- 4 Omnidirectional antennas provide strong Wi-Fi signal
- Concurrently support up to 96 devices connection
- Reyee Mesh builds up flexible multi-solutions for your network
- Easy network management at your fingertips with Reyee Router App

### | Highlight Features





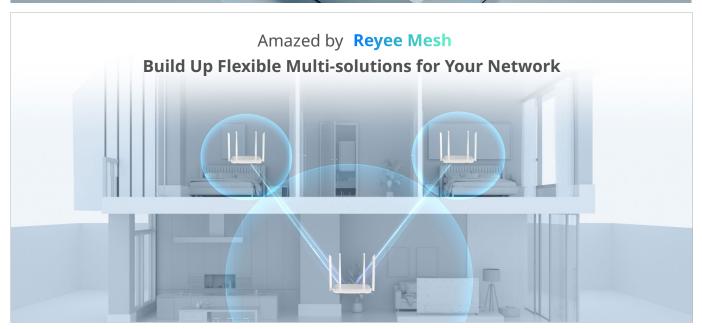

#### Highlight Features

# Good Helper for Your Family Management

**Parental Control** 

Health Mode

Ruijie Cloud App allows you to manage the internet access authority of the specified terminal, including the time limit, URL blocking and black/white list setup.

Parental Control

**Health Mode** 


The health mode limits the radiation exposure and blacks out the indicator lights for you to have a good sleep.



#### **Concurrently Support Multiple Devices Connection**

Dual-Band integration together with the MU-MIMO technology offer low interference and fast speed internet to up to 96 terminals simultaneously.





#### Take Control of Your Home network at Your Fingertips

Set up your home network in Reyee Router App in two minutes. More Life-time Free functions are waiting for you to Explore, Experience, Expect.





Xpress Mode



Share Network







	Basic
Dimensions ( W×D×H )	182 mm x 120 mm x 32 mm (7.17 in. × 4.72 in. × 1.26 in. antennas not included)
Weight	0.22 kg (packages not included)
Wi-Fi Standards	Wi-Fi 5 (802.11ac)
MIMO	2.4 GHz, 2×2, MU-MIMO 5 GHz, 2×2, MU-MIMO
Max. Wi-Fi Speed	2.4 GHz: 300 Mbps 5 GHz: 867 Mbps
Channel Width	2.4 GHz: Auto/20/40 MHz 5 GHz: Auto/20/40/80 MHz
Antennas	4
Antennas Type	External Omnidirectional
Antenna Gain	2.4 GHz: 5 dBi 5 GHz: 5 dBi
WAN Port	1×10/100 Base-T Port
LAN Ports	3×10/100 Base-T Ports
Recommended Users	24
Max. Users	96
Power Supply	DC 12V/0.6A
Power Consumption	≤8.2W
Operation Frequency Bands	802.11b/g/n: 2.400 GHz to 2.483 GHz 802.11a/n/ac: 5.150 GHz to 5.350 GHz 802.11a/n/ac: 5.470 GHz to 5.725 GHz , 5.725 GHz to 5.850 GHz country-specific restrictions apply
DFS	<b>✓</b>
Transmit Power	Regular: CE EIRP: ≤20 dBm (2.4 GHz) ≤27 dBm (5 GHz)
Operating Temperature	0 °C to +45 °C (32 °F to 113 °F)
Operating Humidity	5% to 95% Noncondensing
Certifications	CE, RoHS

Wireless		
OFDMA	-	
MU-MIMO	~	
BSS Coloring	-	
Maximum Number of SSIDs	6	
SSID Hiding	~	
Band Steering	<b>✓</b>	
Guest Wi-Fi	~	
WPA/WPA2	<b>✓</b>	
WPA3	-	
Roaming	Layer 2 Roaming	
Blacklist	<b>✓</b>	
Reyee Mesh	<b>✓</b>	
Mesh Pairing by Hardware	<b>✓</b>	
Mesh Pairing by Mesh Button	<b>✓</b>	
Mesh Pairing by Eweb	<b>✓</b>	
Recommended Hop Count	<2	
Wi-Fi Optimization	<b>✓</b>	
QoS (WMM)	<b>✓</b>	
WPS	-	
Transmission Power Adjustment	<b>✓</b>	
Hardware The Control of the Control		
СРИ	MT7628	
Flash	16M	
RAM/SDRAM	64M	



Hardware Control of the Control of t		
Color	White	
System LED Indicator	<b>✓</b>	
Reyee Mesh LED Indicator	-	
Reyee Mesh Button	<b>✓</b>	
Power Button	-	
Reset Button	<b>✓</b>	
DC Connector Dimensions	5.5 mm x 2.1 mm x 10 mm (0.22 in. × 0.08 in. × 0.39 in. antennas not included)	
	WAN	
Static IP	<b>✓</b>	
DHCP	<b>✓</b>	
PPPoE	<b>✓</b>	
Learning PPPoE Account & Password	<b>✓</b>	
VLAN Tagging	<b>✓</b>	
	LAN	
DHCP Server	<b>✓</b>	
Client List	~	
Static IP Assignment	<b>✓</b>	
Port-Based Flow Control	<b>✓</b>	
Features Features Features		
TR069	<b>✓</b>	
IPv6	<b>✓</b>	
DDNS	<b>✓</b>	
IPTV	<b>✓</b>	

	Features	
Alarm	<b>✓</b>	
Diagnosis	<b>✓</b>	
UPnP	<b>✓</b>	
ARP Binding	<b>✓</b>	
Port Mapping	~	
DMZ Host	✓	
Rate Limitation of Terminals	~	
Hardware Acceleration	<b>✓</b>	
MAC Address Cloning	~	
Cloud Management	<b>✓</b>	
Repeater Mode	~	
WISP Mode	<b>✓</b>	
	Security	
PPTP VPN Server	-	
PPTP VPN Client	<b>✓</b>	
L2TP VPN Client	-	
Parental Control	<b>✓</b>	
Protect TCP Flood Attacks	<b>✓</b>	
Protect ICMP Attacks	<b>✓</b>	
Protect UDP Flood Attacks	~	
System		
Default Access/Password	192.168.110.1 No Password Required by Default	
URL Access	<b>✓</b>	

System	
Local Upgrade	<b>✓</b>
Online Upgrade	<b>✓</b>
APP Upgrade	<b>✓</b>
Syslog	-
Backup	<b>✓</b>
Factory Reset	<b>✓</b>
Language	Chinese English Vietnamese Indonesian Thai Arabic Traditional Chinese Spanish Russian

## **/** Package Contents

Model	RG-EW1200
Wireless Router	1
Power Adapter	1
Quick Start Guide	1
Cat5e UTP Cable	1





#### Copyright ©2000-2024 Ruijie Networks Co., Ltd. All rights reserved.

No part of this document may be reproduced or transmitted in any form or any means without prior written consent of Ruijie Networks Co., Ltd.

#### Notice

This content is applicable only to regions outside the China mainland. Ruijie Networks Co., Ltd. reserves the right to interpret this content.

The information contained herein is subject to change without notice. Nothing herein should be construed as constituting an additional warranty. Ruijie Networks Co., Ltd. shall not be liable for technical or editorial errors or omissions contained herein.



Ruijie Networks Co., Ltd.
Website: https://reyee.ruijie.com/en-global