Ruíjie | Reyce

RG-EW1800GX PRO 1800M Wi-Fi 6 Dual-band Gigabit Mesh Router


DATASHEET



Highlights

- An Unprecedented Wireless Experience with Wi-Fi 6
- Strong Signal Received, Feels like "wall-less"
- Born For Multi-user, support up to 192 terminals
- Exclusive Reyee Mesh provides full space coverage Wi-Fi solution
- Take control of your home network at your fingertips



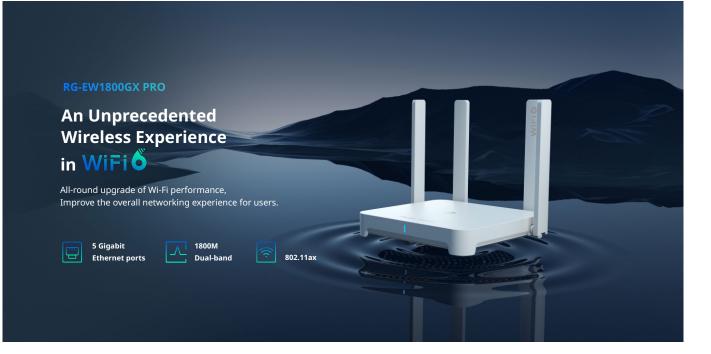


Enter the Era of Wi-Fi 6 Speed With a revolutionary combination of OFDMA and 1024QAM, and the latest 802.11ax standard,


1800GX PRO dual-band concurrent transmission rate reachs 1800Mbps, providing high-speed internet at all time.



...............

Highlight Features

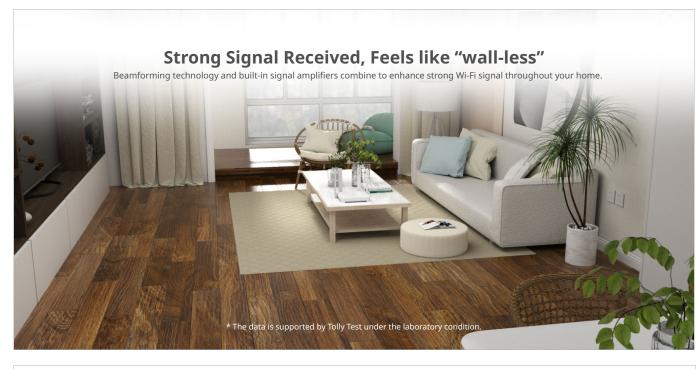

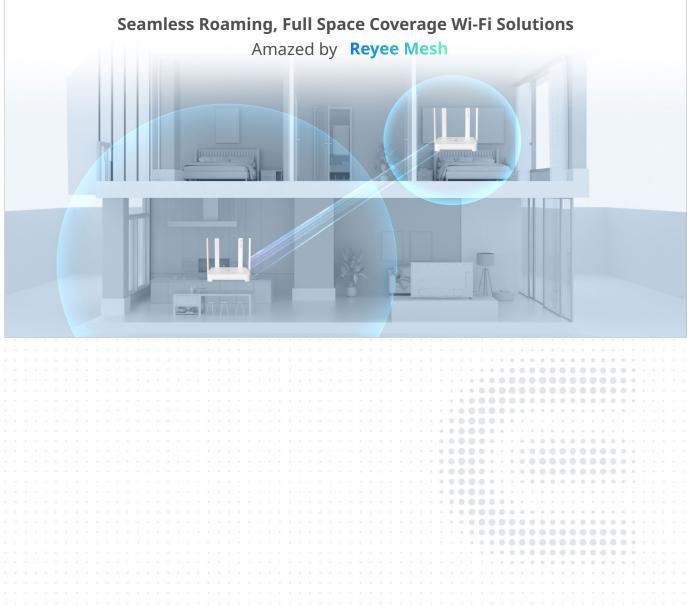


Highlight Features

Born For Multi-user

Upgraded MU-MIMO version together with OFDMA tech provide 2.5× greater capacity to connect more terminals. New-Gen tech "BSS colouring", Smart anti-interference from nearby Wi-Fi signals.





Take Control of Your Home Network at **Fingertips**

Set up your home network in **Reyee Router App** in two minutes. More Life-time Free functions are








阎



Google Play

App Store

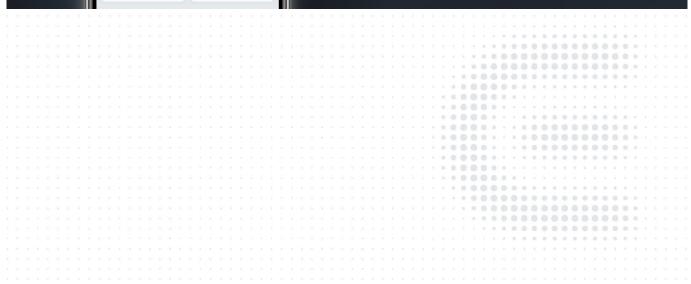



	Basic
Dimensions (W×D×H)	180 mm x 180 mm x 30 mm (7.09 in. × 7.09 in. × 1.18 in. antennas not included)
Weight	0.55 kg (packages not included)
Wi-Fi Standards	Wi-Fi 6 (802.11ax)
MIMO	2.4 GHz, 2×2, MU-MIMO 5 GHz, 2×2, MU-MIMO
Max. Wi-Fi Speed	2.4 GHz: 574 Mbps 5 GHz: 1201 Mbps
Channel Width	2.4 GHz: Auto/20/40 MHz 5 GHz: Auto/20/40/80 MHz
Antennas	4
Antennas Type	External Omnidirectional
Antenna Gain	2.4 GHz: 5 dBi 5 GHz: 6 dBi
WAN Port	1×10/100/1000 Base-T Port
LAN Ports	4×10/100/1000 Base-T Ports
Recommended Users	48
Max. Users	192
Power Supply	DC 12V/1.5A
Power Consumption	≤18W
Operation Frequency Bands	802.11b/g/n/ax: 2.400 GHz to 2.483 GHz 802.11a/n/ac/ax: 5.150 GHz to 5.350 GHz 802.11a/n/ac/ax: 5.470 GHz to 5.725 GHz , 5.725 GHz to 5.850 GHz country-specific restrictions apply
DFS	\checkmark
Transmit Power	Regular: CE EIRP: ≤20 dBm (2.4 GHz) ≤27 dBm (5 GHz)
Operating Temperature	0 °C to +45 °C (32 °F to 113 °F)
Operating Humidity	5% to 95% Noncondensing
Certifications	CE,RoHS



Wireless	
OFDMA	\checkmark
MU-MIMO	\checkmark
BSS Coloring	\checkmark
Maximum Number of SSIDs	6
SSID Hiding	\checkmark
Band Steering	\checkmark
Guest Wi-Fi	\checkmark
WPA/WPA2	\checkmark
WPA3	-
Roaming	Layer 2 Roaming
Blacklist	\checkmark
Reyee Mesh	\checkmark
Mesh Pairing by Hardware	\checkmark
Mesh Pairing by Mesh Button	\checkmark
Mesh Pairing by Eweb	\checkmark
Recommended Hop Count	≤5
Wi-Fi Optimization	\checkmark
QoS (WMM)	\checkmark
WPS	-
Transmission Power Adjustment	\checkmark
Hardware	
CPU	MT7621
Flash	16M



Hardware	
RAM/SDRAM	256M
Color	White
System LED Indicator	\checkmark
Reyee Mesh LED Indicator	\checkmark
Reyee Mesh Button	\checkmark
Power Button	_
Reset Button	\checkmark

DC Connector Dimensions

5.5 mm x 2.1 mm x 9.5 mm (0.22 in. × 0.08 in. × 0.37 in. antennas not included)

WAN		
Static IP	\checkmark	
DHCP	\checkmark	
РРРоЕ	\checkmark	
Learning PPPoE Account & Password	\checkmark	
VLAN Tagging	\checkmark	
LAN		
DHCP Server	\checkmark	
Client List	\checkmark	
Static IP Assignment	\checkmark	
Port-Based Flow Control	\checkmark	

Features	
TR069	\checkmark
ІРνб	\checkmark
DDNS	\checkmark



Features	
IPTV	\checkmark
Alarm	\checkmark
Diagnosis	\checkmark
UPnP	\checkmark
ARP Binding	\checkmark
Port Mapping	\checkmark
DMZ Host	\checkmark
Rate Limitation of Terminals	\checkmark
Hardware Acceleration	\checkmark
MAC Address Cloning	\checkmark
Cloud Management	\checkmark
Repeater Mode	\checkmark
WISP Mode	\checkmark
	Security
PPTP VPN Server	\checkmark
PPTP VPN Client	\checkmark
L2TP VPN Client	-
Parental Control	\checkmark
Protect TCP Flood Attacks	\checkmark
Protect ICMP Attacks	\checkmark
Protect UDP Flood Attacks	\checkmark
System	
Default Access/Password	192.168.110.1 No Password Required by Default



System	
URL Access	\checkmark
Local Upgrade	\checkmark
Online Upgrade	\checkmark
APP Upgrade	\checkmark
Syslog	-
Backup	\checkmark
Factory Reset	\checkmark
Language	Chinese English Vietnamese Indonesian Thai Arabic Traditional Chinese Spanish Russian

Package Contents

Model	RG-EW1800GX PRO
Wireless Router	1
Power Adapter	1
Quick Start Guide	1
Cat5e UTP Cable	1

Rujje Rcycc

Redefine your easy network

Copyright ©2000-2024 Ruijie Networks Co., Ltd. All rights reserved. No part of this document may be reproduced or transmitted in any form or any means without prior written consent of Ruijie Networks Co., Ltd.

Notice

This content is applicable only to regions outside the China mainland. Ruijie Networks Co., Ltd. reserves the right to interpret this content.

The information contained herein is subject to change without notice. Nothing herein should be construed as constituting an additional warranty. Ruijie Networks Co., Ltd. shall not be liable for technical or editorial errors or omissions contained herein.



Ruijie Networks Co., Ltd. Website: https://reyee.ruijie.com/en-global