

Quick Installation Guide

LTE-Advanced Mobile WiFi
MODEL NO. M7350




710650484 REV1.00

Connecting to the Internet


1 Install the SIM card and battery

Open the cover upwards, and install the SIM card and battery as shown.


Step 1:




Step 2:



Step 3:



Step 4:




*SIM card not provided by TP-LINK.

*Micro or Nano SIM cards should be converted using provided SIM card trays.

2 Turn on the M7350

Hold the **Power** button until the screen appears as shown below. (You can also hold the **Power** button until the screen appears "Power off" to turn off the M7350.)




*Advanced configuration

For advanced configuration, please enter the web-management page: Open your web browser and type <http://tplinkmifi.net> or <http://192.168.0.1> into the address bar, then enter the default user name and password: **admin**, and click **Login**.

3 Connecting to the Internet

When turned on, the M7350 will boot for a while. You will then see one of the following messages. Please follow the corresponding instructions.




Establish a Wireless Connection

Search for the Wireless Network name (SSID) and type in the Wireless Password, both of which can be found on the screen or rear cover label.

To check the SSID and Password on the screen:

1. Press the **MENU** button to display the menu.
2. Press the **MENU** button to scroll to **Device Info**.
3. Press the **Power** button to enter **Device Info**.



*We suggest changing the wireless name and password on the web-management page for your own security.



Enjoy!

Enter the PIN Code

1. Open your web browser and type <http://tplinkmifi.net> or <http://192.168.0.1> in the address bar, then enter the default user name and password: **admin**, and click **Login**.
2. Enter the correct PIN code according to your ISP, and click **Apply**.

Note: 1. If "No Service" appears on your screen, please verify the following and repeat step **3**.

- Verify that your SIM card is an LTE, WCDMA or GSM SIM card.
- Verify that your SIM card is in your ISP's service area.
- Verify that your SIM card has sufficient credit.

2. If "No SIM Card" appears on your screen, please turn off the M7350 and repeat steps **1** ~ **3**.

FAQ(Frequently Asked Questions)

FAQ1. What should I do if I cannot log into the web-management page?

- Verify that your device is connecting to the M7350.
- Verify that you entered the correct IP address <http://tplinkmifi.net> or <http://192.168.0.1>.
- Verify that your device is obtaining an IP address automatically.

FAQ2. What should I do if I cannot access the Internet?

Tip1. Check the LAN connection

Open your web browser and type <http://tplinkmifi.net> or <http://192.168.0.1> in the address bar, Check if you can log into the web-management page successfully. If not, please refer to FAQ 1 and retry.

Tip2. Check your ISP parameters

1. On your PC, log into the web-management page, choose "Advanced->Dial-up->Dial-up Settings" to verify the parameters are correct with your ISP. These parameters include APN, User name and Password.
2. If these settings are not correct, please click **Create** to create a new profile with the correct parameters, and then choose the new profile from the Profile List.

Tip3. Check the Mobile Data

1. On your PC, log into the web-management page, choose "Advanced->Dial-up->Dial-up Settings" to verify that **Mobile Data** is on.

2. If the **Mobile Data** is off, enable it to access the Internet.

Tip4. Check the Data Roaming

1. Please confirm on the screen if you are in roaming service. If roaming, the icon will appear on the screen.
2. On your PC, log into the web-management page, choose "Advanced->Dial-up->Dial-up Settings", and then enable the **Data Roaming**.

Note: You can also enable the **Data Roaming** on the screen.

Tip5. Check the Data Limit


1. On your PC, log into the web-management page, choose "Advanced->Data Settings" to verify if the **Total Used** has exceeded the **Total Allowance**.
2. If it is, click **Correct** and set **Total Used** to zero. You can also turn off the **Data Limit** to access the Internet again.

FAQ3. What should I do if my Internet speed is slow?


- Tip1. The 4G network may be in poor condition. Press the **MENU** button to scroll to **Network Mode**, press the **Power** button and try another mode.
- Tip2. The 2.4G WiFi network may be interfered. Recommend using the 5G WiFi network if your devices support it. Press the **MENU** button to scroll to **WiFi 2.4G/5G**, press the **Power** button and choose the 5G WiFi band.

Charging Your M7350

Method 1 Via the Power Adapter (Recommend)

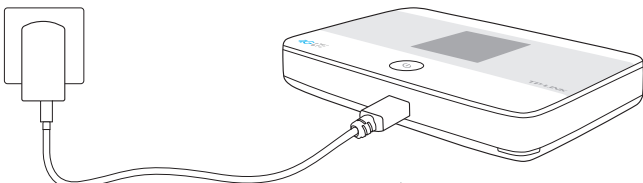

Method 2 Via Computer USB

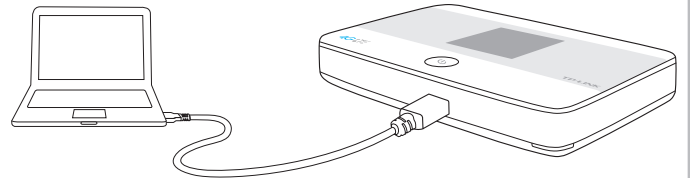

*The M7350 has been fully charged when the lighting symbol (⚡) of battery icon disappeared.

Power Saving Mode

For power saving, you may encounter the two situations below:

1. The screen will turn off automatically after 15 seconds.
2. The WiFi connection will turn off automatically if no WiFi devices connect to the M7350 for 15 minutes.


You can simply tap the  button or MENU button to recover.




Please refer to the User Guide to modify the Wi-Fi Auto-disable Time setting.









Power Saving

Screen Display



 Network Type and Signal Strength
 Internet Connection
 Data Roaming


 WiFi Status and User Numbers
 Messages
 Battery Meter

 0.0B/s↓ Download Speed
 0.0B/s↑ Upload Speed
 0.00B Cumulative Traffic Usage

Restoring to Factory Defaults Settings

Method 1 On your PC, log into the web-management page, go to “Advanced->Device->Factory Defaults”, and click **Restore**.

Method 2 Press and hold the **Reset** button for about 5 seconds until the screen appears “Reboot”.

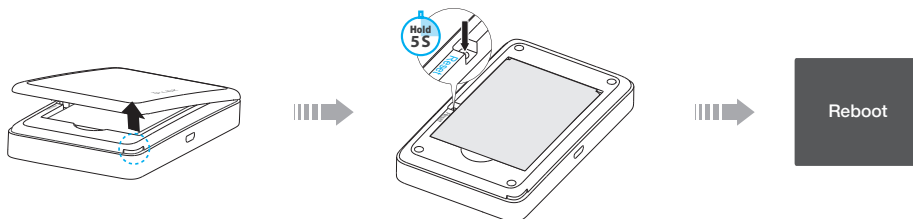

*Once the M7350 is restored, all the current configurations will be lost and you may need to reconfigure it.

Important Safety Information

- Keep the device away from water, fire, humidity or hot environments.
- Do not attempt to disassemble or modify the device.
- Do not use damaged power adapter or USB cables to charge the device.
- Do not use any chargers other than those recommended.
- Do not use the device where wireless devices are not allowed.

*Please follow the above instructions when operating the device. We cannot guarantee that no accidents or damage will take place due to improper use of the device. Please use with care and operate at your own risk.

For More Information

For more information, please visit our website: <http://www.tp-link.com>

