

DH-KVM0X01HM-E100

4/8-CHANNEL HDMI AUTO USB KVM SWITCH



4CH HDMI KVM SWITCH



8CH HDMI KVM SWITCH

System Overview

The KVM can save your money, time, devices and energy. You can control multiple computers by a set of keyboard, mouse and monitor. The KVM can use the function of USB hot-plug to start multiple computers simultaneously.

Functions

- USB2.0 port;
- Delicate and compact designed;
- High compatibility, support various wide screens, various brand keyboard and mouse, like Microsoft, Logitech, etc;
- Hot-plug and play, easy and portable;
- Resolution up to 1920*1440, bandwidth up to 250MHZ;
- Support DOS, WIN3.X, WIN95/98/98SE/2000/ME/XP/7/8/10, WinNT, UNIX/LINUX;
- Metal housing facilitates anti-interference;
- No software required-PC selection via push buttons or hotkeys;
- Auto scan function for monitoring PC operation;
- LED display for monitoring status;
- Buzzer sound for switching port confirmation

Technical Specification

Performance

Model	DH-KVM0401HM-E100	DH-KVM0801HM-E100
System	DOS, WIN3.X, WIN95/98/98SE/2000/ME/XP/7/8/10, WinNT, UNIX/LINUX	
Computer Connections	4	8
Port Selection	Hotkeys, buttons	

Interfaces

Connectors	Console Ports	Keyboard	1 USB Type A Female	
		Video	1 HDMI Type A Female	
		Mouse	1 USB Type A Female	
		Speakers	None	
	KVM Ports	Keyboard/Mouse	4	8
		Video	4	8
USB		4	8	

LED	Selected	9	17
Cable Length	Computers	4x 1.5m	4x 1.5m, 4x 1.8m
Emulation	Keyboard/Mouse	USB/PS2	
Video	1920 x 1440, 1080P		
Scan Interval	3- 99 seconds adjusting		

Others

Power Supply	DC12V 500mA		
Power Consumption	≤2W		
Working Temperature	-45℃~+65℃		
Working Humidity	10% ~ 80%, Non-condensing		
Unit Dimension	100mm×291mm×45.5mm (W*L*H)	136.5mm×430.8mm×45.5mm(W*L*H)	
Weight	0.74Kg	1.28Kg	


Ordering Information		
Type	Part Number	Description
AUTO USB KVM SWITCH	DH-KVM0401HM-E100	Simple;Easy;High cost-efficient
	DH-KVM0801HM-E100	Simple;Easy;High cost-efficient

Dimensions (mm/inch)


Unit: mm



Front

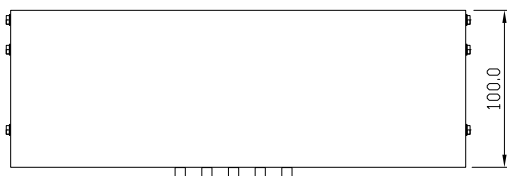


Bottom




4CH HDMI KVM SWITCH

Unit: mm



Front

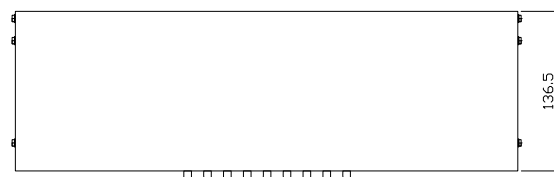

Bottom



Rear

8CH HDMI KVM SWITCH

