




SanDisk® Z400s SSD (Solid State Drive)

COST EFFECTIVE AND RELIABLE HDD REPLACEMENT

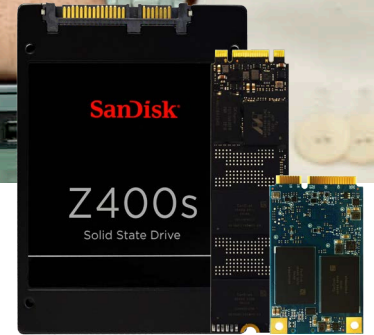

The SanDisk Z400s is a cost effective SSD designed to replace HDDs in computing platforms. On par with HDD pricing, it can outperform HDDs by a factor of 20, while providing 5 times the reliability at 1/20th the power consumption.

The Z400s is highly versatile and can accommodate a wide range of platforms with its variety of form factors and capacities. It is available in 2.5" 7mm cased, M.2 (2242 & 2280), and mSATA form factors with capacities from 32GB up to 256GB.

| | | | |
|-------------|------------|-------------|--|
| SATA | SAS | PCIe | |
|-------------|------------|-------------|--|

Z400S KEY FEATURES

VERTICALLY INTEGRATED VALIDATION

LOW POWER WITH DEVSLP SUPPORT FOR GREEN, FANLESS DESIGNS

32GB-256GB CAPACITIES

2.5" 7MM, M.2 (2242 & 2280), AND MSATA FORM FACTORS

TESTED FOR 20 TBW (32GB), 40 TBW (64GB), AND 72 TBW (128 AND 256GB)

SHOCK-RESISTANT

HIGHER RELIABILITY THAN HDDS

EASY MIGRATION

SATA REVISION 3.2 6GB/S INTERFACE

WINDOWS® WHCC CERTIFIED



The Z400s has also been validated for use in several of the top OEM platforms in the industry, demonstrating its endurance and ability to sustain high-volume transactions. Its solid-state design means there are no moving parts, making it shock-resistant and much more reliable than traditional HDDs, which translates into lower total cost of ownership (TCO) and a better end-user experience.

Low Power

The Z400s utilizes breakthrough SanDisk technology that optimizes power consumption, making it one of the lowest power consuming SSDs at 30mW for average power. This increases the amount of usable hours per battery charge, which is essential for modern mobile devices.

TCO

SanDisk SSDs are more reliable than HDDs, which can improve total cost of ownership (TCO) by reducing downtime due to hard drive failures. They also offer lower latency and greater read/write speeds over traditional HDDs*, so users may experience a noticeable improvement in responsiveness. IT departments can extend the useful life of their PC inventory by upgrading the HDDs to the Z400s SSD, thus prolonging replacement cycles and maximizing asset value.

SanDisk is a trademark of SanDisk Corporation, registered in the United States and other countries. Other brand names mentioned herein are for identification purposes only and may be the trademarks of their holder(s).

©2015 SanDisk Corporation. All right reserved.

Contact information

businesspartners@sandisk.com

Specifications subject to change without notice.

* As compared to 7200 RPM SATA 2.5" hard drive. Based on published specifications and internal benchmarking tests.

¹ Up to stated speed. Performance is based on the CrystalDiskMark benchmark using a 1000MB LBA range on Gigabyte GA-Z77X-UD5H desktop with Intel Z77 chipset, Intel i7-3770 3.4GHz, 8M, Ivy Bridge, Windows 8 64-bit SP1 using IntelIRST version 11.0.1013, secondary drive, C-state off. Performance may vary based on host device. 1 megabyte (MB) = 1 million bytes. IOPS = input/output operations per second.

² Endurance of the Z400s SSD is calculated using JEDEC client workload (JESD219). TBW = terabytes written.

³ Power measurements 25°C. Based on FW version with HIPM-enable.

⁴ MTTF = Mean Time To Failure based on internal testing using Telcordia stress part testing.

⁵ 3 year warranty in regions not recognizing "limited". See www.sandisk.com/wug for more details.

SanDisk®

SOLID STATE FOR BUSINESS

Corporate Headquarters:

951 SanDisk Drive

Milpitas, CA 95035-7933, USA

www.sandisk.com

SanDisk® Z400s SSD Product Features and Specifications

Specifications are preliminary and subject to change

| Device | | SanDisk Z400s SSD | | | |
|---|-----------|--|--------|--------|--------|
| Form Factor | | 7mm 2.5-inch, M.2 (2242 & 2280), mSATA | | | |
| Interface | | SATA III (6 Gb/s) backward compatible to SATA II and I | | | |
| Size & Weight | 2.5": | 7.00mm x 69.85mm x 100.5mm @ 30 ± 1g | | | |
| | M.2 2242: | 3.50mm x 22.00mm x 42.0mm @ 4.1 ± 0.6g | | | |
| | M.2 2280: | 2.23mm x 22.00mm x 80.0mm @ 5.5 ± 0.5g | | | |
| | mSATA: | 3.82mm x 29.85mm x 50.8mm @ 5 ± 0.5g | | | |
| Performance [4KB QD32]¹ | | 32GB | 64GB | 128GB | 256GB |
| Seq. Read up to (MB/s) | | 279 | 546 | 546 | 546 |
| Seq. Write up to (MB/s) | | 48 | 94 | 182 | 342 |
| Rand Read up to (IOPS) | | 17,300 | 32,900 | 35,500 | 36,600 |
| Rand Write up to (IOPS) | | 10,600 | 21,700 | 43,300 | 69,400 |
| Endurance (TBW)² | | 20 | 40 | 72 | 72 |
| Power | | 32GB | 64GB | 128GB | 256GB |
| Average Power (mW)³ | | 30 | 30 | 30 | 30 |
| Active Power (W)³ | | 1.6 | 1.6 | 1.6 | 1.6 |
| Max Read Operating (mW) | | 1,200 | 1,600 | 1,600 | 1,600 |
| Max Write Operating (mW) | | 1,300 | 1,500 | 1,900 | 2,600 |
| Slumber (mW) | | 14 | 14 | 14 | 14 |
| DEVSLEP (mW) | | ≤3 | ≤3 | ≤3 | ≤3 |
| Reliability | | | | | |
| MTTF⁴ | | Up to 1,750,000 hours | | | |
| Environmental | | | | | |
| Operating Temperatures | | 0°C to 70°C | | | |
| Non-operating Temperatures | | -55°C to 85°C | | | |
| Operating Vibration | | 5.0 gRMS, 10 - 2000 Hz | | | |
| Non-operating Vibration | | 4.9 gRMS, 7 - 800 Hz | | | |
| Shock | | 1,500 G @0.5 msec half sine | | | |
| Certifications | | FCC, UL, TUV, KC, BSMI, VCCI | | | |

Ordering Information

| Form Factor | Capacity | SKU # |
|-------------|----------|--------------|
| 2.5" 7mm | 32GB | SD8SBAT-032G |
| 2.5" 7mm | 64GB | SD8SBAT-064G |
| 2.5" 7mm | 128GB | SD8SBAT-128G |
| 2.5" 7mm | 256GB | SD8SBAT-256G |
| mSATA | 32GB | SD8SFAT-032G |
| mSATA | 64GB | SD8SFAT-064G |
| mSATA | 128GB | SD8SFAT-128G |
| M.2 2242 | 32GB | SD8SMAT-032G |
| M.2 2242 | 64GB | SD8SMAT-064G |
| M.2 2242 | 128GB | SD8SMAT-128G |
| M.2 2280 | 64GB | SD8SNAT-064G |
| M.2 2280 | 128GB | SD8SNAT-128G |
| M.2 2280 | 256GB | SD8SNAT-256G |

Pack-Out Option Use:
-1122 = Individual Package