

CelluLink **Smartcell 112&212**

Cellular Gateway for One or Two ISDN Lines

- One or two integrated dual band GSM Modules (900/1800MHz)
- Remote maintenance via GSM network
- SMS & Fax capabilities, Alarm SMS message
- Predefined MSN for each module
- Gain Control
- SIM lock
- NT or TE interface
- Echo cancellation
- Heavy duty operation
- Toll restriction



CelluLink **Smartcell 112&212**
Cellular Gateway Experts

Additional advantages:

- Superb audio quality, cutting edge technology
- Quick and easy installation
- Quick Return On Investment (ROI)
- Interface to Cellular Least Cost Routing (LCR)

Quasar is an industry expert in cellular gateways. CelluLink product lines create a direct connection between the office PBX and the cellular network.

CelluLink Smartcell 112 & 212 enable cost savings of up to 50%, eliminating the interconnection charges between cellular and landline (PTT) networks.

Quasar offers

- Professional technical support
 - Flexibility and attentiveness to your needs
 - Thorough training of your technical staff
 - Marketing support


CelluLink **Smartcell 112&212**

Cellular Gateway for One or Two ISDN Lines

Technical specifications:

Mains voltage	230V 50 Hz
Supply voltage (secondary)	12V DC
Supply current	2A max.
Dimensions	240 x 120 x 45 mm (L x W x H)
Operating temperature	0°C to 40°C
Standards	Full CE
ISDN Specifications	
Line Interface	BRI, NT/TE
Protocol	EuroISDN
Dial tone	400± Hz 1%
Connector type	RJ-45
GSM channel specifications	
Cellular Interface	WaveCom or Telit GSM Module
Networks supported	Dual Band EGSM 900/GSM 1800/1900MHz
Standards	Full Type Approval according to GSM phase 2+spec.
External antenna	FME connectors

Specifications are subject to change without notice

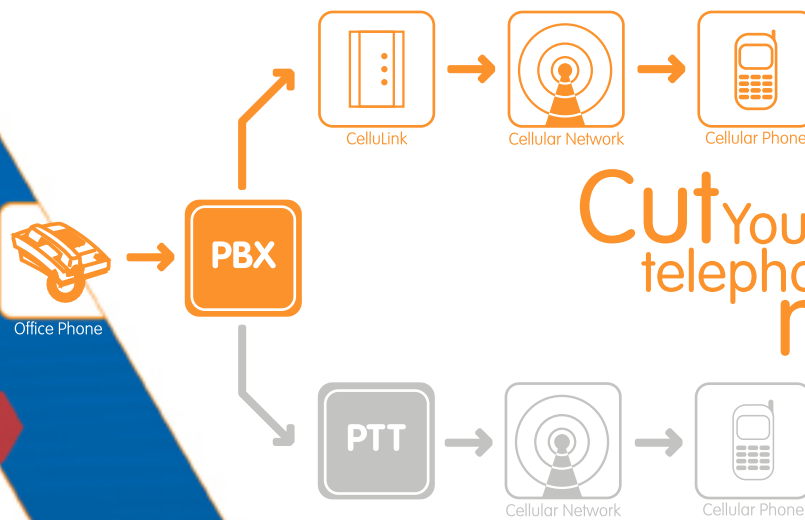

Cut Your telephone bill now!

Why choose Quasar

- The Cellular Gateway Experts
- Unique quality and performance
- Impressive track record and references
- Strong R&D capabilities
- Innovative vision of product development

