



AC 3200 Wireless Tri-Band Gigabit Router Archer C3200

Highlights

- your network without a drop in performance
- bands
- balance network demand
- without interruption
- coverage area and stability





AC3200

Smart Connect

• Tri-Band technology – Three separate Wi-Fi bands for connecting more devices to

• Up to 3200Mbps Wi-Fi speed – 600Mbps over 2.4GHz and 1300Mbps over two 5GHz

• Smart Connect– Helps devices run faster by assigning them to the best channel to

· 1GHz dual-core CPU and three co-processors – Handle simultaneous connections

• Maximum Coverage and Stability – Six high-performance antennas maximize





6 Antennas Dual Core 1 GHz CPU

Beamforming Technology



TP-LINK Tether App



Features



Speed

- Blazing Fast Wireless Speed Combined wireless
 speeds up to 3.2Gbps at 2.4GHz & 2 *5GHz bands
- Dual-core CPU & 3 co-processors 1GHz dual-core CPU and three co-processors handle simultaneous connections without interruption
- Gigabit Wired Speed Full shielded gigabit ports ensure ultrafast data transfer speeds
- Support 802.11 ac Offering 3 times faster data rate than 802.11n in a single stream



Wi-Fi Range

- Ultimate Range & Reliable Wi-Fi Six high-performance external antennas greatly increase the Archer C3200's range and signal stability.
- Laser-Focused Wi-Fi Beamforming technology further improves the router's coverage by helping it locate wireless devices to form stronger, more reliable connections.



Reliability


- Tri-band technology Creates three separate Wi-Fi bands for connecting more devices to your network without a drop in performance
- Smart Connect Helps devices run faster by assigning them to the best channel to balance network demand
- IP QoS Advanced QoS automatically recognizes & prioritizes streaming & gaming applications

Features



Easy Sharing

- · Dual USB Ports for Fast Sharing With one ultra-fast USB 3.0 port and one USB 2.0 port, you can access and share a printer as well as your files and media locally. Via the router's FTP server, you can also have access to your files & media with networked devices remotely
- 10x Faster Transfer Speed The USB 3.0 port provides up to 10x faster USB hard drive access than earlier USB 2.0 connections
- Built-in Print Server Supports wireless printing from multiple computers (works in conjunction with a USB Printer)
- Built-in Media Server Allows users to play music, video and view photos

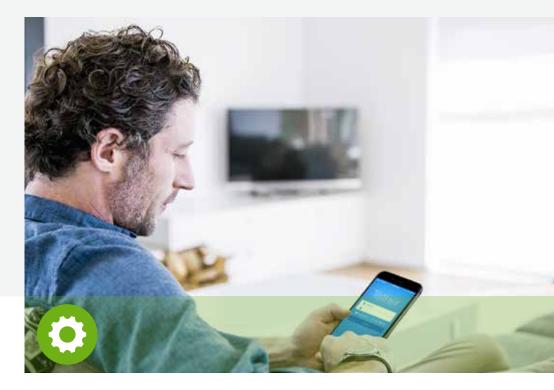

Ease of Use

- 3-Step Quick Installation Easy Setup Assistant supporting multiple languages provides a quick & hassle free installation
- Fast Encryption Easy one-touch WPA wireless security encryption with the WPS button
- Easy On/Off Wi-Fi On/Off Button allows users to turn wireless radio on or off
- Power On/Off Convenient power saving
- Hassle-free Management with Tether App Tether App allows easy network management at your fingertips



Security

- Access Control Guest Network Access provides secure Wi-Fi access for guests
- Parental Control Establish restricted access policies for all connected devices
- Easy Bandwidth Management IP-based Bandwidth Control makes it easier for you to manage the bandwidth of connected devices
- VPN Support Secure access to your home or office network from remote devices
- Encryptions for Secure Network WPA-PSK/WPA2- PSK encryptions provide active defense against security threats for user networks


More Wi-Fi for More Devices

The Archer C3200 uses Tri-Band technology to run three separate Wi-Fi channels at once, creating a network that can connect to more devices without a trade-off in performance.

Smart Connect helps devices run even faster by assigning them to the best available channel to balance network demand.


Run All Your Devices At Once

A powerful 1GHz dual-core CPU and three co-processors easily handle the demand made on the Archer C3200's network when multiple users are browsing, streaming, and gaming all at the same time.

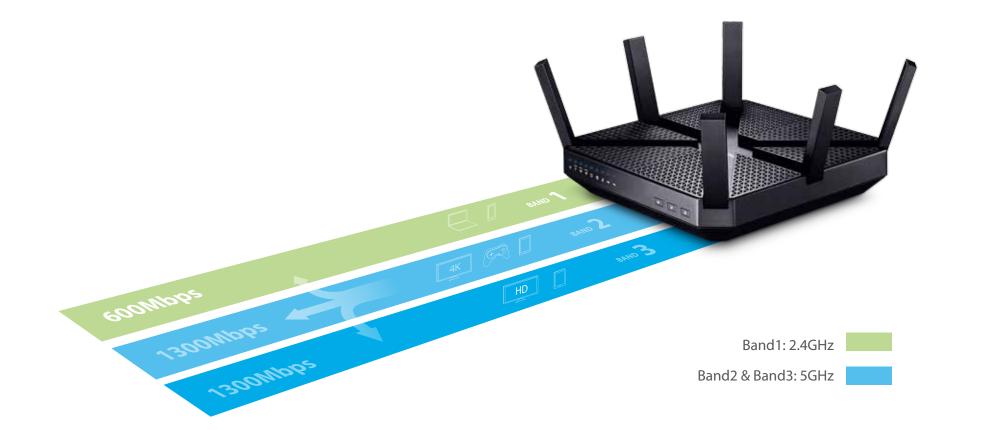

1GHz dual-core CPU boosts router performance

3 co-processors optimize the wireless signal on 2.4GHz and 2*5GHz bands

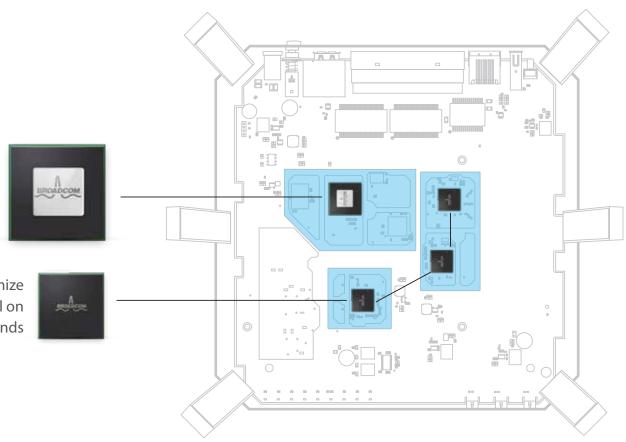


Specifications

Hardware

- Ethernet Ports: 4 * 10/100/1000Mbps LAN Ports & 1 * 10/100/1000Mbps WAN Port
- USB Port: 1 USB 3.0 Port + 1 USB 2.0 Port
- Button: Wireless On/Off Button, Power On/Off Button, LED On/Off Button, WPS Button, Reset Button
- External Power Supply: 12V/5A
- Dimensions (W x D x H): 7.9 X 7.9 X 1.5 in. (200 X 200 X 39mm)
- · Antenna: 3 dual band Fixed antennas & 3 single band Fixed antenna

Wireless

- 2.4GHz- Up to 600Mbps

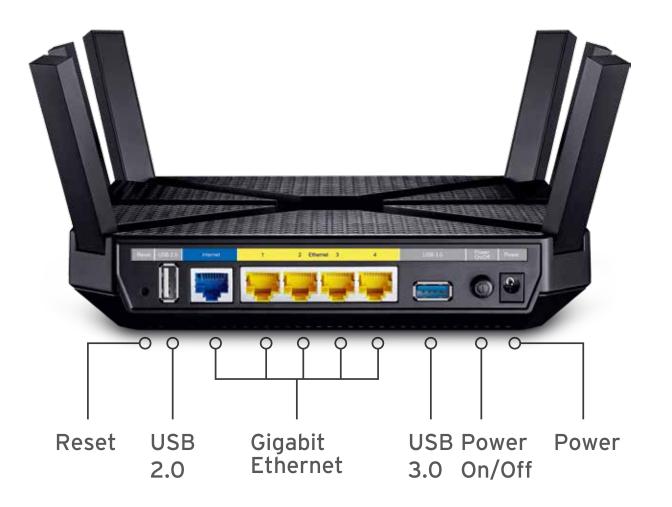

• Wireless Standards: IEEE 802.11ac/n/a 5GHz, IEEE 802.11b/g/n 2.4GHz

• Frequency: 2.4GHz and 5GHz Band1/Band4

• Signal Rate: 5GHz Band1- Up to 1300Mbps, 5GHz Band2- Up to 1300Mbps,

• Transmit Power: CE: <20dBm(2.4GHz), <23dBm(5GHz)

FCC: <30dBm

Reception Sensitivity: 5GHz: 11a 6Mbps: -94dBm

11a 54Mbps: -76dBm

11ac HT20: -68dBm

11ac HT40: -64dBm

2.4G: 11g 54Mbps: -77dBm

11n HT20: -73dBm

11n HT40: -71dBm

• Wireless Function: Enable/Disable Wireless Radio, WMM, Wireless Statistics • Wireless Security:64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA-PSK2 encryption • Guest Network: 2.4GHz guest network \times 1, 5GHz guest network \times 2

Specifications

Software

- WAN Type: Dynamic IP/Static IP/PPPoE/PPTP(Dual Access)/L2TP(Dual Access)
- DHCP: Server, Client, DHCP Client List, Address Reservation
- Quality of Service: WMM, Bandwidth Control
- Port Forwarding: Virtual Server, Port Triggering, UPnP, DMZ
- Dynamic DNS: DynDns, NO-IP
- VPN Pass-Through: PPTP, L2TP, IPSec
- IPSec VPN : Up to 10 IPSec VPN tunnels
- Access Control: Parental Control, Local Management Control, Host list, Access Schedule, Rule Management
- Firewall Security: DoS, SPI Firewall, IP Address Filter/Domain Filter, IP and MAC Address Binding
- Protocols: Supports IPv4 and IPv6
- USB Sharing: Supports Samba(Storage)/FTP Server/Media Server/Printer Server
- Management: Access Control, Local Management, Remote Management

Others

Package Contents

- Power supply unit
- Ethernet Cable
- · Quick Installation Guide
- Certification
- CE, FCC, RoHS

System Requirements

- NetWare, UNIX or Linux

Environment

· AC3200 Wireless Tri-Band Gigabit Router Archer C3200

· Microsoft Windows 98SE, NT, 2000, XP, Vista[™] or Windows 7, 8, 8.1, MAC OS, • Operating Temperature: $0^{\circ}C \sim 40^{\circ}C$ (32 °F ~104 °F) • Storage Temperature: -40 $^\circ$ C ~70 $^\circ$ C (-40 $^\circ$ F ~158 $^\circ$ F) · Subscription with an Internet Service Provider (for Internet access)

• Operating Temperature: $0^{\circ}C \sim 40^{\circ}C$ ($32^{\circ}F \sim 104^{\circ}F$) · Storage Temperature: -40 $^{\circ}$ C ~70 $^{\circ}$ C (-40 $^{\circ}$ F ~158 $^{\circ}$ F) · Operating Humidity: 10%~90% non-condensing • Storage Humidity: 5%~90% non-condensing

Others

Ideal to use with



 AC1200 Wireless Dual Band USB Adapter Archer T4U



AC1200 High Gain Wireless
 Dual Band USB Adapter
 Archer T4UH

Similar Products





Rest Interpretended For more information, please visit

http://www.tp-link.com/en/products/details/?categoryid=&model=Archer+C3200

or scan the QR code left

Specifications are subject to change without notice. TP-LINK is a registered trademark of TP-LINK Technologies CO., Ltd. Other brands and product names are trademarks of their respective holders. No part of the specifications may be reproduced in any form or by any means or used to make any derivative such as translation, transformation, or adaptation without permission from TP-LINK Technologies CO., Ltd.

Maximum wireless speed of up to 1900Mbps is the theoretical data rate derived from IEEE standard 802.11 specifications. Actual data throughput and wireless coverage will vary due to network traffic, building materials and construction, network overhead, actual data throughput art and wireless coverage. TP-LINK makes no express or implied representations or warranties about this product's compatibility with any future standards. 802.11 a 450Mbps. 2.4GHz Performance Mode requires 256 QAM support on Wi-Fi client.

www.tp-link.com