



720p HD video quality



Record directly to a microSD card



Motion detection alerts



See up to 15 feet in the dark



WPS and mobile app for easy setup



mydlink® apps for remote viewing



DCS-2132L HD WI-FI CAMERA

Features

Premium Resolution and Visibility

- HD 1280 x 720p resolution image quality
- See up to 15 feet in complete darkness with built-in IR LEDs
- Supports H.264/M-JPEG video codecs
- 10x digital zoom for close-up viewing

Security

- PIR sensor for enhanced motion detection
- Built-in microphone and speaker for 2-way audio
- MicroSD/SDHC card slot for recorded footage
- Motion detection triggers e-mail/push alert notifications
- Save snapshots/video clips to your mobile device

Ease of Use

- Uses Wireless N technology so you can install the camera anywhere with ease
- WPS support for easy wireless connection

Convenient Control with mydlink® Support

- mydlink app support for iPhone, iPad, Android and Windows phone
- mydlink portal for easy viewing and management

Overview


Monitor and protect your home or business - anytime, anywhere - with the HD Wi-Fi Camera (DCS-2132L). Place it anywhere and stay informed with built-in motion detection and 2-way audio. Send e-mail notifications with snapshots or video clips whenever motion is detected using just the HD Wi-Fi Camera and an Internet connection. Monitor your home or small office around-the-clock with the built-in infrared LEDs, giving you up to 16 feet of night time viewing.

See More with HD


The HD Wi-Fi Camera delivers the confidence of 720p HD video clarity, ensuring rich detail and crisp image quality for your surveillance recordings. And with integrated night vision and PIR motion-sensing technology, the DCS-2132L remains vigilant 24 hours a day, whether you're there or not.

Convenient Access Anytime, Anywhere with mydlink®

Enhanced with mydlink® support, the HD Wi-Fi Camera makes it easy and convenient for you to look after your family, pets, home or small business. With a mydlink enabled camera, you can stay connected to everything you love from anywhere, anytime. Access your camera through the mydlink website or one of the mydlink mobile apps to view and manage your camera through your desktop, laptop, tablet or mobile phone, no matter where you are.

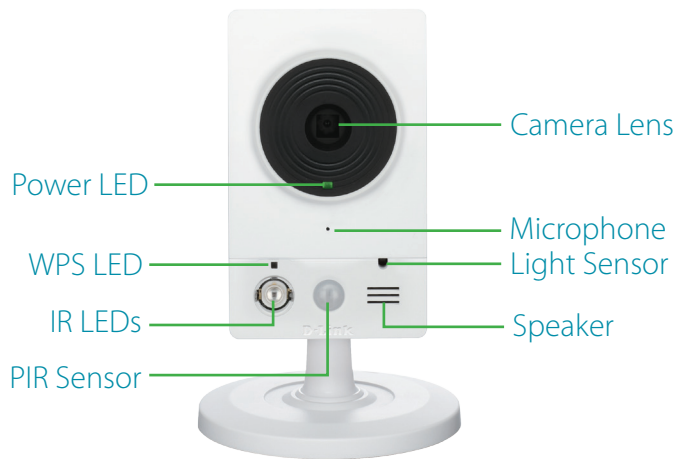

Front View

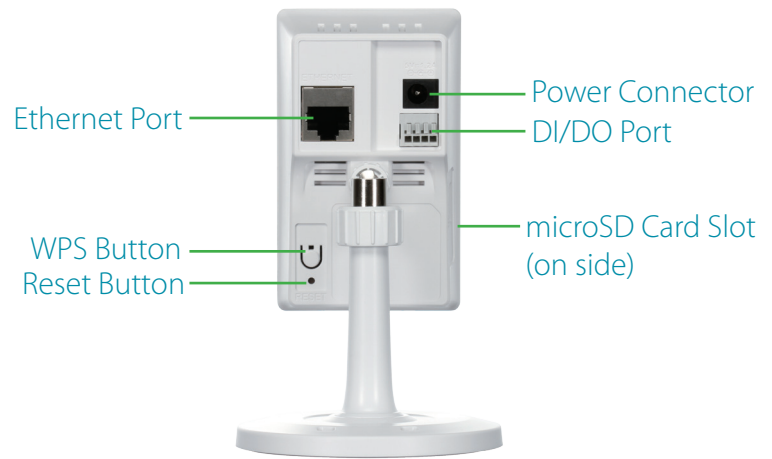

Back View

Technical Specifications

Camera

Hardware Profile	<ul style="list-style-type: none"> • 1/4" megapixel progressive CMOS sensor • 15 feet IR illumination distance • Minimum illumination: 0 lux with IR LEDs on • Built-in Infrared-Cut Removable (ICR) Filter module • Built-in PIR sensor (15 feet) • 10x digital zoom • Focal length: 3.45 mm 	<ul style="list-style-type: none"> • Aperture: F2.0 • Angle of view: <ul style="list-style-type: none"> • (H) 57.8° • (V) 37.8° • (D) 66° • Built-in microphone and speaker
Image Features	<ul style="list-style-type: none"> • Adjustable image size, quality, frame rate and bit rate • Adjustable brightness, saturation, contrast, sharpness and hue 	<ul style="list-style-type: none"> • Configurable motion detection windows • Time stamp and text overlays • Configurable privacy mask zones
Video Compression	<ul style="list-style-type: none"> • Simultaneous H.264/MPEG-4/MJPEG format compression 	<ul style="list-style-type: none"> • JPEG for still images • H.264/MPEG-4 multicast streaming
Video Resolution	<ul style="list-style-type: none"> • 1280 x 800 at up to 30 fps • 800 x 450 at up to 30 fps 	<ul style="list-style-type: none"> • 640 x 360 at up to 30 fps • 480 x 270 at up to 30 fps
Audio	<ul style="list-style-type: none"> • G.726 	<ul style="list-style-type: none"> • G.711
External Device Interface	<ul style="list-style-type: none"> • Power LED • WPS Button • WPS LED • Reset Button 	<ul style="list-style-type: none"> • 10/100 BASE-TX Ethernet Port • DI/DO port • microSD/SDHC Card Slot • Power Connector

Network

Network Protocols	<ul style="list-style-type: none"> • IPv6, IPv4, TCP/IP, UDP, ICMP • DHCP Client • NTP Client (D-Link) • DNS Client • DDNS Client (D-Link) • SMTP Client • FTP Client • HTTP / HTTPS • Samba Client 	<ul style="list-style-type: none"> • PPPoE • RTP, RTSP, RTCP • UPnP Port Forwarding • IP Filtering • QoS • CoS • Multicast • IGMP • Onvif Compliant
Security	<ul style="list-style-type: none"> • Administrator and user group protection • Password authentication 	<ul style="list-style-type: none"> • HTTP and RTSP digest encryption


System Integration		
System Requirements for Web Interfaces	<ul style="list-style-type: none"> Operating system: Microsoft Windows 7¹, XP SP2¹, Vista¹ or Mac OS X (10.5 and above) 	<ul style="list-style-type: none"> Browser: Internet Explorer 6, Firefox v3 or above, Safari 4 or above, Chrome v2 or higher with Java installed and enabled
Event Management	<ul style="list-style-type: none"> Event notification and uploading of snapshots/video clips via e-mail (SMTP) or FTP Motion detection 	<ul style="list-style-type: none"> Supports multiple SMTP and FTP servers Multiple event notification Multiple recording methods for easy backup
D-ViewCam™ System Requirements	<ul style="list-style-type: none"> Operating system: Microsoft Windows 7, XP, Vista Browser: Internet explorer 7 or higher 	<ul style="list-style-type: none"> Protocol: Standard TCP/IP
D-ViewCam™ Software Functions	<ul style="list-style-type: none"> Remote management/control of up to 32 cameras Viewing of up to 32 cameras on one screen 	<ul style="list-style-type: none"> Scheduled motion triggered, or manual recording options Supports all management functions provided in web interface
Remote Access		
Remote Management	<ul style="list-style-type: none"> Configuration accessible via web browser 	<ul style="list-style-type: none"> Take snapshots/video clips and save to local hard drive or NAS via web browser
Mobile Support	<ul style="list-style-type: none"> mydlink Lite app for iOS, Android and Windows 	<ul style="list-style-type: none"> mydlink+ app for iOS and Android
General		
Weight	<ul style="list-style-type: none"> 0.26 lbs 	
Power	<ul style="list-style-type: none"> 5 V DC 1.2 A, 50/60 Hz 	
Power Consumption	<ul style="list-style-type: none"> 3.65 watts 	
Temperature	<ul style="list-style-type: none"> Operating: 32 to 104 °F (0 to 40 °C) 	<ul style="list-style-type: none"> Storage: -4 to 158 °F (-20 to 70 °C)
Humidity	<ul style="list-style-type: none"> Operating: 20% to 80% non-condensing 	<ul style="list-style-type: none"> Storage: 5% to 95% non-condensing
Certifications	<ul style="list-style-type: none"> CE CE LVD 	<ul style="list-style-type: none"> FCC Class B C-Tick
Dimensions	<ul style="list-style-type: none"> 2.28 x 5.04 x 3.5 inches 	
Package Contents	<ul style="list-style-type: none"> HD Wi-Fi Camera (DCS-2132L) Power adapter 	<ul style="list-style-type: none"> Ethernet cable Quick install guide
Order Information		
<i>Part Number</i>	<i>Description</i>	
DCS-2132L	HD Wi-Fi Camera	

¹Computer must adhere to Microsoft's recommended system requirements.

For more information

U.S.A. | 17595 Mt. Herrmann Street | Fountain Valley, CA 92708 | 800.326.1688 | dlink.com

©2015 D-Link Corporation/D-Link Systems, Inc. All rights reserved. D-Link, the D-Link logo, mydlink and the D-link RoHS logo are trademarks or registered trademarks of D-Link Corporation or its subsidiaries in the United States and/or other countries. Other trademarks or registered trademarks are the property of their respective owners. iPhone and iPad are registered trademarks of Apple Inc. Android is a trademark of Google Inc. Windows is a registered trademark of Microsoft Inc.



mydlink Lite only

D-Link[®]