


## Key Features

- SuperClear® technology
- Advanced ergonomic stand for tilt or flat
- HDMI, DisplayPort and VGA inputs
- 50M:1 dynamic contrast ratio
- Supports Windows® 7/8/10 and selected Linux, Chrome, and Android



## Product Description

The ViewSonic TD2760 is an ideal solution for both commercial and consumer touch screen applications. With an intuitive 10-point multi-touch display and 1080p Full HD resolution, the 27-inch TD2760 delivers a versatile solution for use in the office or at home, as well as for use as an information kiosk in public areas, retail, and corporate sectors. SuperClear® technology with ultra-wide viewing angles and 50M:1 MEGA Dynamic Contrast Ratio bring greater definition and clarity to multimedia content. For added convenience, cross-platform compatibility works with operating systems such as Windows 10, Linux, Chrome, and Android.\* Built-in connectivity options include DisplayPort, HDMI, and VGA ports along with a VESA mount design, offering additional convenience for use as a wall-mounted display. Additionally, the RS232 port provides local control for other RS232 connected devices, while HDMI CEC offers local control of multiple connected devices such as HD set-top boxes, media players, and sound systems. The TD2760's ergonomic stand makes it easy for the user to tilt and raise the monitor, or lay it flat for the most natural position, and create a comfortable working environment. Lastly, low power consumption with Energy Star certification saves energy costs while reducing carbon emission. \*Supports Windows 7/8/10, the latest Linux Kernel 4.X/3.X, the latest Chrome version, and Android 6.0 & 7.0

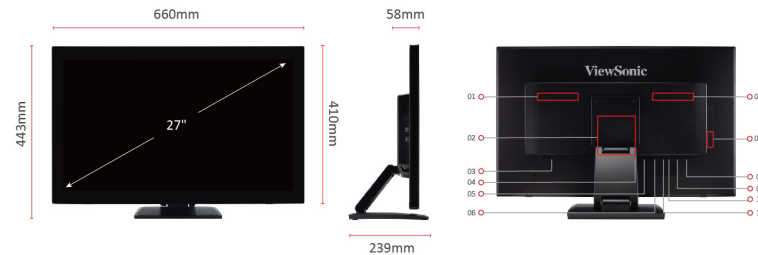

- |  |                        |
|--|------------------------|
| 1. Internal Speakers                     | 7. USB Down Stream X 2 |
| 2. VESA Compatible(Wall Mount 100x100mm) | 8. USB Up Stream       |
| 3. AC In                                 | 9. RS232               |
| 4. DisplayPort                           | 10. Earphone           |
| 5. HDMI                                  | 11. Audio In           |
| 6. VGA                                   |                        |

Visit Us - [www.viewsonic.com](http://www.viewsonic.com)

LCD PANEL		POWER		GENERAL	
Display Size (in.):	27	Eco Mode (Conserve):	19W	Regulations:	cTUVus, FCC-B, ICES003, Energy Star, MX-CoC, Mexico Energy, CE, CE EMC, CB, RoHS, ErP, REACH, WEEE, EAC, UkrSEPRO, RCM, GEMS
Viewable Area (in.):	27	Eco Mode (optimized):	22W		
Panel Type:	VA Technology	Consumption (typical):	26W	PACKAGE CONTENTS:	TD2760 x1, 3-pin Plug (IEC C13 / CEE22) x1, VGA Cable (Male-Male) x1, HDMI Cable (v1.4; Male-Male) x1, Audio Cable (Male-Male) x1, USB A/B Cable (v3.0; Male-Male) x1, Quick Start Guide x1
Resolution:	1920 x 1080	Consumption (max):	28W		
Resolution Type:	FHD	Voltage:	AC 100-240V, 50/60 Hz		
Static Contrast Ratio:	3,000:1 (typ)	Stand-by:	0.3W		
Dynamic Contrast Ratio:	50M:1	Power Supply:	Internal	Recycle/Disposal:	Please dispose of in accordance with local, state or federal laws.
Light Source:	LED	<b>ADDITIONAL HARDWARE</b>			
Brightness:	230 cd/m2 with touch; 300 cd/m2 without touch	Kensington Lock Slot:	1	Warranty:	*Warranty offered may differ from market to market
Colours:	16.7M	Cable Organization:	N/A		
Colour Space Support:	8 bit (6 bit + Hi-FRC)	<b>CONTROLS</b>		Country Of Origin:	China
Aspect Ratio:	16:9	Physical Controls:	1, 2, Up, Down, Power		
Response Time (Typical GTG):	6ms	On Screen Display:	Auto Image Adjust, Contrast/Brightness, Input Select, Audio Adjust, Color Adjust, Information, Manual Image Adjust, Setup Menu, Memory Recall	Power Management:	Energy Star standards
Response Time (GTG w/OD):	6ms	<b>OPERATING CONDITIONS</b>			
Response Time (MPRT):	N/A	Temperature:	32°F to 104°F (0°C to 40°C)		
Viewing Angles:	178° horizontal, 178° vertical	Humidity (non-condensing):	20% to 90%		
Backlight Life (Hours):	30000 Hrs (Min)	<b>WALL MOUNT</b>			
Curvature:	Flat	VESA Compatible:	100 x 100 mm		
Refresh Rate (Hz):	60	<b>INPUT SIGNAL</b>			
Blue Light Filter:	Yes	Frequency Horizontal:	15 ~ 90KHz		
Flicker-Free:	Yes	Frequency Vertical:	50 ~ 76Hz		
X Lighting:	N/A	<b>VIDEO INPUT</b>			
Colour Gamut:	NTSC: 72% size (Typ)	Digital Sync:	TMDS - HDMI (v1.4), PCI-E - DisplayPort (v1.2)		
Pixel Size:	0.311 mm (H) x 0.311 mm (V)	Analog Sync:	Separate/Composite/SOG - RGB Analog		
<b>COMPATIBILITY</b>		<b>ERGONOMICS</b>			
PC Resolution (max):	1920x1080	Height Adjust (mm):	N/A		
Mac® Resolution (max):	1920x1080	Swivel:	N/A		
PC Operating System:	Windows 7/8.1/10 certified; macOS tested	Tilt (Forward/Back):	-4° / 90°		
Mac® Resolution (min):	1920x1080	Pivot (Right/Left):	N/A		
<b>CONNECTOR</b>		<b>WEIGHT (IMPERIAL)</b>			
VGA:	1	Net (lbs):	17.4		
USB 3.0 Type A:	2	Net Without Stand (lbs):	12.2		
USB 3.0 Type B:	1	Gross (lbs):	22.6		
3.5mm Audio In:	1	<b>WEIGHT (METRIC)</b>			
3.5mm Audio Out:	1	Net (kg):	7.9		
Display Port:	1	Net Without Stand (kg):	5.5		
Power in:	3-pin Socket (IEC C14 / CEE22)	Gross (kg):	10.2		
RS232 In:	1	<b>DIMENSIONS (IMPERIAL) (WXHxD)</b>			
<b>TOUCH</b>		Packaging (in.):	29.6 x 20.7 x 8		
Touch Technology:	Capacitive multi-point touch	Physical (in.):	26 x 17.5 x 9.4		
Touch Points:	10	Physical Without Stand (in.):	26 x 16.2 x 2.3		
Surface Treatment:	Anti-Glare, Hard Coating (≥6H)	<b>DIMENSIONS (METRIC) (WXHxD)</b>			
Glass Thickness:	1.88mm	Packaging (mm):	753 x 525 x 204		
<b>AUDIO</b>		Physical (mm):	660 x 443 x 239		
Internal Speakers:	2Watts x2	Physical Without Stand (mm):	660 x 410 x 58		