

NVR201-08LP Network Video Recorder



NVR201-08LP


Key Features

- 8-channel input
- Third-party IP cameras supported with ONVIF conformance
- HDMI and VGA output up to 1080P
- Accurate retrieval, instant playback
- 1 SATA HDD up to 6 TB
- 8 RJ-45 POE+ Interface
- Support for P2P, UPnP, NTP, DHCP, PPPoE
- Support for mobile client access


Specifications

NVR201-08LP	
Video and Audio	
IP Video input:	8-ch
Two-way audio input:	1-ch,RCA
Network	
Incoming bandwidth:	64Mbps
Outgoing bandwidth:	64Mbps
Remote connection:	16
Video/Audio Output	
HDMI/VGA output	HDMI/VGA: 1920*1080P/60HZ,1920*1080P/50HZ,1600*1200/60HZ,1280*1024/60HZ,1280*720/60HZ,1024*768/60HZ
Recording Resolution:	8MP@25、6MP@25、4MP@30、3MP@30、1080P@30、720P@30
Audio Output:	1-ch,RCA
Synchronous Playback:	4-ch
Decoding	
Live view/ Playback:	8MP@25、6MP@25、4MP@30、3MP@30、1080P@30、720P@30
Capability:	16 x 720P@25,6 x 1080P@25, 3 x 4MP@25, 2 x 4MP@30, 2 x 6MP@25, 1 x 8MP@25
Hard Disk	
SATA:	1 SATA interface
Capacity:	Up to 6TB for each disk
External Interface	
Network Interface:	1 RJ-45 10M/100M adaptive Ethernet Interface
USB Interface:	1 x USB2.0, 1 x USB3.0
POE	
Interface:	8 independent 10/100 Mbps Poe Ethernet interfaces
Supported Standard:	IEEE 802.3at
General	
Power Supply:	52 VDC, 1.8A
Consumption(without hard disk and POE):	≤8 W (without hard disk)
Working Temperature:	-10°C ~ + 55°C (+14°F ~ +131°F)
Working Humidity:	10% ~ 90%
Dimensions:	270.0 ×205.0 × 41.8 mm (10.6" × 8.1" × 1.6")
Weight(without HDD):	≤1.3KG

Dimensions

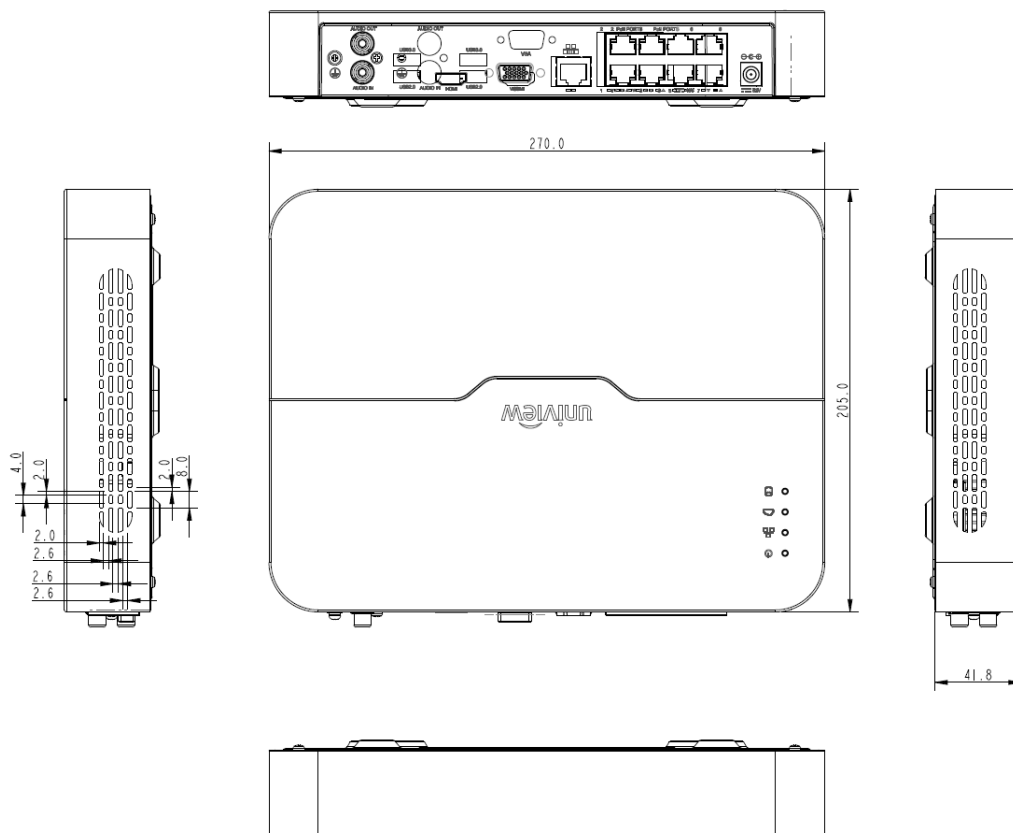

Rear Panel

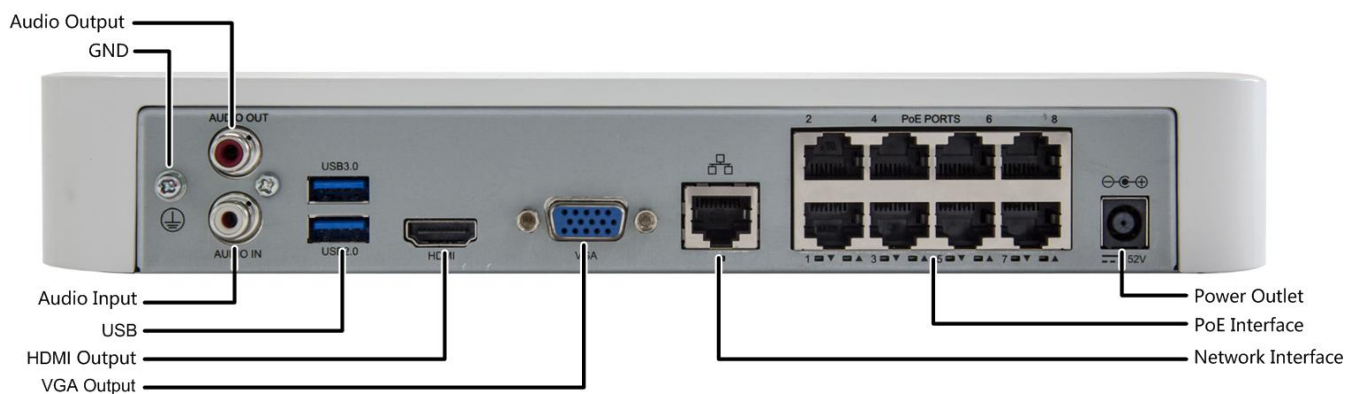

Zhejiang Uniview Technologies Co., Ltd.

South Tower, Building 10, Wanlun Science Park, 88 Jiangling Road, Hangzhou, P.R.China 310051

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2015 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.