



# PURE ROCK SLIM

Q U I E T   A N D   C O M P A C T   C O O L I N G

**120W TDP**

## IDEAL APPLICATIONS

Gaming and multimedia systems  
Demanding graphics applications  
Compact PC cases

## HIGHLIGHTS

High cooling efficiency  
Silence-optimized 92mm be quiet! fan  
Compact and space-saving design  
Compatible with Intel® and AMD™

### Quiet and Compact Cooling

be quiet! Pure Rock Slim is especially suitable for compact PC systems and for anyone who wants a category-beating price-to-performance ratio.

#### Highlights »

- High 120W TDP cooling efficiency
- Full configuration of RAM memory banks in PC cases with limited space
- Three high-performance 6mm heat pipes with aluminum caps
- A silence-optimized, seven blade 92mm be quiet! fan (max. 25.4dB(A))
- PWM variable speed operation to help balance cooling and quietness
- Compact and asymmetrical design for easier and more convenient installation
- Compatibility with Intel® and AMD™ sockets
- Brushed aluminum finish
- 3-year manufacturer's warranty
- Product conception, design and quality control in Germany


#### Pure Rock Slim »

For famous be quiet! low noise operation and cooling performance at entry level pricing, Pure Rock Slim is clearly your CPU cooler choice. There is simply no reason to settle for less.

# PURE ROCK SLIM

QUIET AND COMPACT COOLING

## Details »

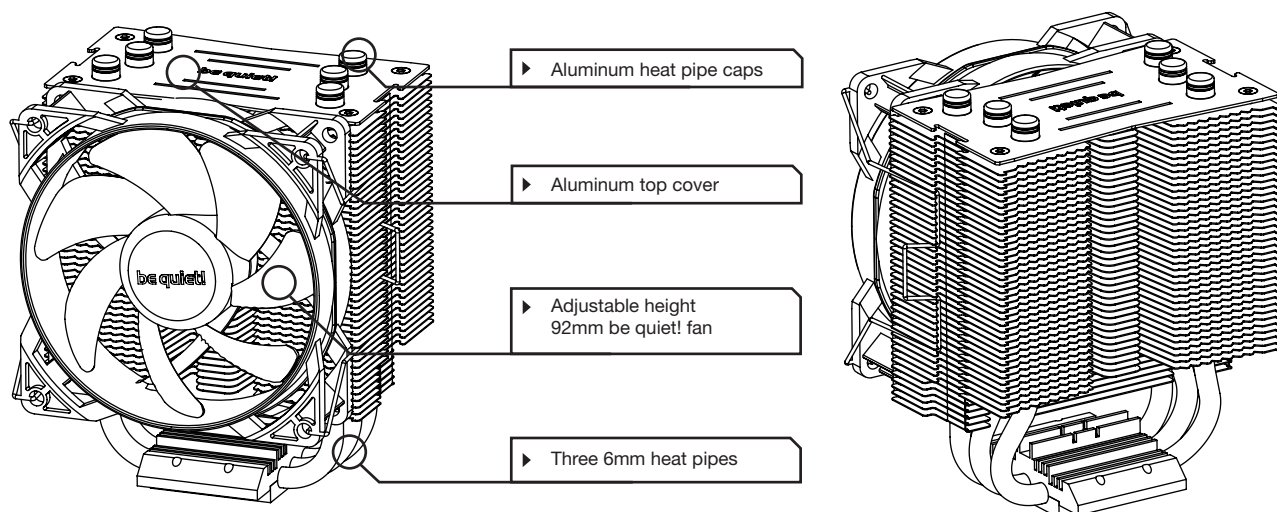

### Technical data for complete cooler unit »

Type of cooler	Pure Rock Slim
Model number	BK008
Dimensions, incl. fan (L x W x H in mm)	81.8 x 97 x 124.8
Weight, incl. fan (g)	358
Heat sink material	Aluminum
Socket compatibility	Intel®: 1150 / 1151 / 1155 / 1156 AMD™: AM2(+) / AM3(+) / FM1 / FM2(+)
Maximum power capacity (W TDP)	120
Number of heat pipes / diameter (mm)	3 / 6
Noise level (dB(A)) @ 50 / 75 / 100%	13.1 / 19.2 / 25.4

### Technical data for be quiet! PWM fan »

Fan dimension (mm)	92 x 92 x 25
Fan motor technology	4-pole
Bearing type	Sleeve
Fan speed (rpm) @ 100% PWM	2,000
Noise level (dB(A)) @ 2,000rpm	25.4
Airflow (cfm ; m3/h)	35.14 ; 59.38
Air pressure (mm / H2O)	1.67
Input current (A)	0.32
Connector	4-pin PWM
Lifespan (h)	80,000
Accessories	Thermal grease (already applied to cooler), Intel® push pin mounting (pre-installed), clamp for AMD™ mounting, Manual (EN, DE, FR, PL, ES, RU)

### Certifications »



### Contact »

Service Hotline: +49 40 7367 686 44  
(Mondays to Fridays from 9:00am to 5:30pm CET)

Mail: [service@bequiet.com](mailto:service@bequiet.com)