

ViewSonic® LED DISPLAY | **VX2758-PC-MH**


Key Features

- 1ms MPRT response time
- 144Hz refresh rate
- AMD FreeSync™ technology
- 88% NTSC & 120% sRGB wide colour gamut size
- Low input lag



Product Description

The ViewSonic VX2758-PC-mh provides the perfect balance of eye comfort and immersion thanks to its 1800R curvature and 88% NTSC, 120% sRGB colour size. A 1ms MPRT response time and minimal input lag produce unprecedented speed that reinforces your reaction time in game, while a 144Hz refresh rate combined with AMD FreeSync™ technology deliver a smooth gaming experience free of screen tearing and stuttering. The VX2758-PC-mh also comes equipped with ViewSonic's exclusive ViewMode™ presets, which offer optimised screen performance for different home entertainment applications, such as watching movies, editing files, or playing video games. Two HDMI ports and a VGA input offer flexible connectivity for both general use and entertainment.

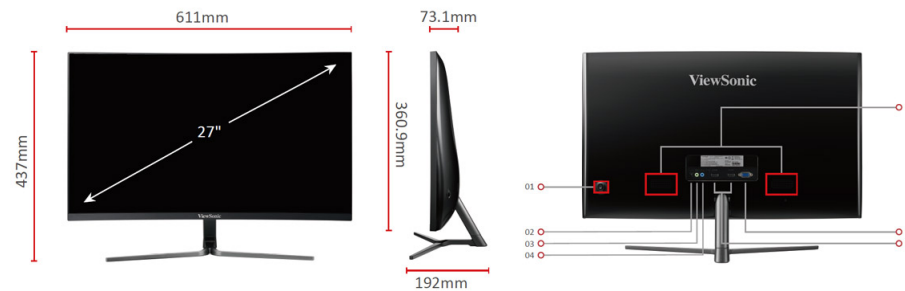

1. OSD Joystick
 2. AC Power in
 3. Audio out
 4. Headphone
 5. HDMI x 2
 6. VGA
 7. Internal Speakers
-

Visit Us — www.viewsonic.com

LCD PANEL		POWER		GENERAL	
Display Size (in.):	27	Eco Mode (Conserve):	18W	Regulations:	CE, CE EMC, C REACH, WEEE BSMI, RCM, GE
Viewable Area (in.):	27	Eco Mode (optimised):	21W		
Panel Type:	VA Technology	Consumption (typical):	24.5W	PACKAGE CONTENTS:	VX2758-PC-mh C13 / CEE22) x Male-Male) x1, Quick Start Gui
Resolution:	1920 x 1080	Consumption (max):	26W		
Resolution Type:	FHD	Voltage:	AC 100-240V, 50/60 Hz	Recycle/Disposal:	Please dispose local, state or fe
Static Contrast Ratio:	3,000:1 (typ)	Stand-by:	0.5W		
Dynamic Contrast Ratio:	80M:1	Power Supply:	External	Warranty:	*Warranty offer market to mark
Light Source:	LED	ADDITIONAL HARDWARE			
Brightness:	280 cd/m2 (typ)	Kensington Lock Slot:	1		
Colours:	16.7M	CONTROLS			
Colour Space Support:	8 bit (6 bit + A-FRC)	Physical Controls:	Up, Right, Down, Left, Power		
Aspect Ratio:	16:9	On Screen Display:	Input Select, Audio Adjust, ViewMode, Colour Adjust, Manual Image Adjust, Setup Menu		
Response Time (Typical GTG):	4ms	OPERATING CONDITIONS			
Response Time (GTG w/OD):	4.8ms	Temperature:	32°F to 104°F (0°C to 40°C)		
Response Time (MPRT):	1ms	Humidity (non-condensing):	20% to 90%		
Viewing Angles:	178° horizontal, 178° vertical	INPUT SIGNAL			
Backlight Life (Hours):	30000 Hrs (Min)	Frequency Horizontal:	15 ~ 160KHz		
Curvature:	1800R	Frequency Vertical:	48 ~ 144Hz		
Refresh Rate (Hz):	144	VIDEO INPUT			
Adaptive Sync:	FreeSync	Digital Sync:	TMDS - HDMI (v1.4), TMDS - HDMI (v2.0)		
Blue Light Filter:	Yes	Analog Sync:	Separate/Composite/SOG - RGB Analog		
Flicker-Free:	Yes	ERGONOMICS			
Colour Gamut:	NTSC: 88% size (Typ) sRGB: 120% size (Typ)	Tilt (Forward/Back):	-5° / 20°		
Pixel Size:	0.311 mm (H) x 0.311 mm (V)	WEIGHT (METRIC)			
Surface Treatment:	Anti-Glare, Hard Coating (3H)	Net (kg):	4.3		
COMPATIBILITY		Net Without Stand (kg):	4		
PC Resolution (max):	1920x1080	Gross (kg):	6.3		
Mac® Resolution (max):	1920x1080	DIMENSIONS (METRIC) (WXHXD)			
PC Operating System:	Windows 10 certified; macOS tested	Packaging (mm):	680 x 510 x 144		
Mac® Resolution (min):	1920x1080	Physical (mm):	611 x 437 x 192		
CONNECTOR		Physical Without Stand (mm):	611 x 361 x 73		
VGA:	1				
3.5mm Audio In:	1				
3.5mm Audio Out:	1				
HDMI 2.0:	1				
HDMI 1.4:	1				
Power in:	External power adapter				
AUDIO					
Internal Speakers:	2Watts x2				