

ViewSonic® LED DISPLAY | **VX3258-2KPC-MHD**


Key Features

- 1ms MPRT response time
- 144Hz refresh rate
- AMD FreeSync™ technology
- 88% NTSC & 120% sRGB wide colour gamut size
- WQHD 1440p resolution



Product Description

The ViewSonic VX3258-2KPC-mhd's 1800R curved screen and WQHD resolution offer an immersive viewing experience with stunning detail. The monitor's 88% NTSC, 120% sRGB colour size delivers vivid colours and well-balanced image quality, while its 1ms response time and minimal input lag provide unprecedented screen quality and speed. A 144Hz refresh rate makes animations more smooth and AMD FreeSync™ technology virtually eliminates screen tearing and stuttering for a fluid gaming experience. The VX3258-2KPC-mhd also comes equipped with ViewSonic's exclusive ViewMode™ presets, which offer optimised screen performance for different home entertainment applications, such as watching movies, editing, or playing video games. Two HDMI and two DisplayPort inputs offer flexible connectivity for both general use and entertainment. *This monitor is GeForce Driver G-Sync Enable-Ready [Disclaimer].

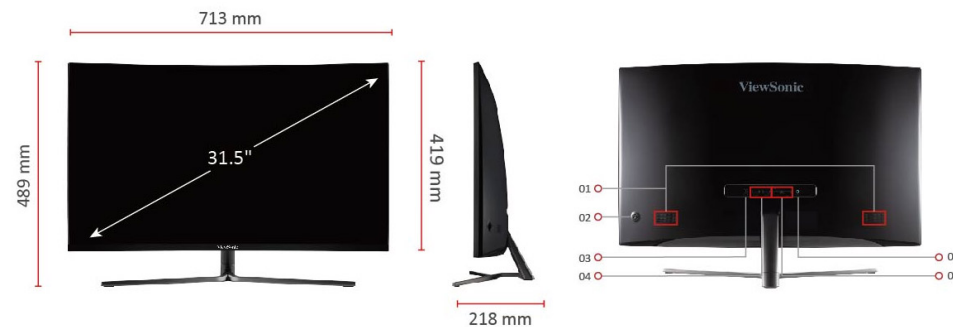

1. Internal Speakers
2. Menu Controls
3. DC in
4. HDMI x 2
5. Earphone
6. DisplayPort x 2

Visit Us ■ www.viewsonic.com

LCD PANEL		AUDIO		DIMENSIONS (IMPERIAL) (WXHxD)	
Display Size (in.):	32	Internal Speakers:	2.5Watts x2	Packaging (in.):	30.6 x 22.4 x 6.1
Viewable Area (in.):	31.5	POWER		Physical (in.):	28.1 x 19.3 x 8.1
Panel Type:	VA Technology	Eco Mode (Conserve):	N/A	Physical Without Stand (in.):	28.1 x 16.5 x 3.1
Resolution:	2560 x 1440	Eco Mode (optimized):	N/A	DIMENSIONS (METRIC) (WXHxD)	
Resolution Type:	QHD	Consumption (typical):	N/A	Packaging (mm):	776 x 569 x 167
Static Contrast Ratio:	3,000:1 (typ)	Consumption (max):	N/A	Physical (mm):	713 x 489 x 218
Dynamic Contrast Ratio:	80M:1	Voltage:	AC 100-240V, 50/60 Hz	Physical Without Stand (mm):	713 x 419 x 79
Light Source:	LED	Stand-by:	N/A	GENERAL	
Brightness:	300 cd/m2 (typ)	Power Supply:	External	Regulations:	CE, CE EMC, C REACH, WEEE BSMI, RCM, KC
Colours:	16.7M	ADDITIONAL HARDWARE		PACKAGE CONTENTS:	VX3258-2KPC-1 (IEC C13 / CEE Cable (v1.2; Ma Adapter x1, Qui
Colour Space Support:	8 bit + Hi-FRC	Kensington Lock Slot:	1		
Aspect Ratio:	16:9	CONTROLS		Recycle/Disposal:	Please dispose local, state or fe
Response Time (Typical GTG):	22ms	Physical Controls:	Up, Right, Down, Left, Power	Warranty:	*Warranty offer market to mark
Response Time (GTG w/OD):	5ms	On Screen Display:	Input Select, Audio Adjust, ViewMode, Colour Adjust, Manual Image Adjust, Setup Menu	Country Of Origin:	China
Response Time (MPRT):	1ms	OPERATING CONDITIONS			
Viewing Angles:	178° horizontal, 178° vertical	Temperature:	32°F to 104°F (0°C to 40°C)		
Backlight Life (Hours):	30000 Hrs (Min)	Humidity (non-condensing):	20% to 90%		
Panel Surface:	Anti-Glare, Hard Coating (3H)	WALL MOUNT			
Curvature:	1800R	VESA Compatible:	N/A		
Refresh Rate (Hz):	144	INPUT SIGNAL			
Adaptive Sync:	FreeSync	Frequency Horizontal:	22 ~ 222KHz		
Blue Light Filter:	Yes	Frequency Vertical:	48 ~ 144Hz		
Flicker-Free:	Yes	VIDEO INPUT			
X Lighting:	N/A	Digital Sync:	TMDS - HDMI (v2.0), PCI-E - DisplayPort (v1.2)		
Colour Gamut:	NTSC: 88% size (Typ) sRGB: 120% size (Typ)	ERGONOMICS			
Pixel Size:	0.272 mm (H) x 0.272 mm (V)	Height Adjust (mm):	N/A		
COMPATIBILITY		Swivel:	N/A		
PC Resolution (max):	2560x1440	Tilt (Forward/Back):	-5° / 10°		
Mac® Resolution (max):	2560x1440	Pivot (Right/Left):	N/A		
PC Operating System:	Windows 10 certified; macOS tested	WEIGHT (IMPERIAL)			
Mac® Resolution (min):	2560x1440	Net (lbs):	13		
CONNECTOR		Net Without Stand (lbs):	11		
3.5mm Audio Out:	1	Gross (lbs):	19.6		
HDMI 2.0 (with HDCP 2.2):	2	WEIGHT (METRIC)			
Display Port:	2	Net (kg):	5.9		
Power in:	External power adapter	Net Without Stand (kg):	5		
TOUCH		Gross (kg):	8.9		
Touch Technology:	N/A				
Touch Points:	N/A				