


Key Features

- 144Hz refresh rate ensures clarity in motion
- 1ms (MPRT) response time ensures smooth images
- AMD FreeSync™ Premium prevents screen tearing
- QHD 1440p resolution for clear detail
- SuperClear® IPS panel for vivid picture quality and wider viewing angles



Product Description

With 144Hz refresh rate and SuperClear® IPS panel, the ViewSonic XG2705-2K provides a stunning viewing experience. A high 144Hz refresh rate delivers clarity in motion while AMD FreeSync™ Premium, virtually eliminates screen tearing and stuttering for a fluid gaming experience. With 1ms MPRT response time, the monitor delivers smooth images without ghosting. Flexible connectivity via DisplayPort and two HDMI ports make connection to other peripherals or high-end graphics cards for gaming a breeze. The XG2705-2K is also equipped with ViewSonic's exclusive ViewMode™ presets, which offer user-customized game modes, including FPS, RTS and MOBA game settings.

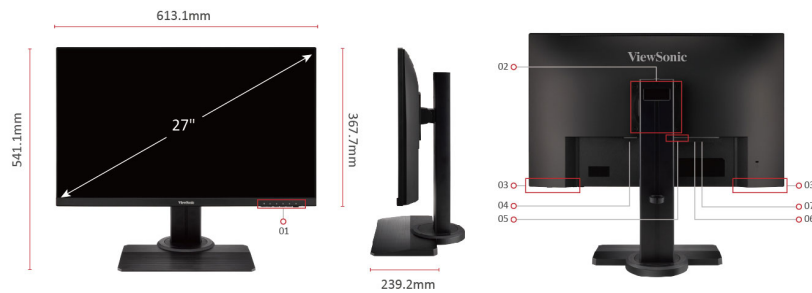

1. Menu Controls
2. VESA Compatible (Wall Mount 100x100mm)
3. Internal Speakers
4. AC In
5. HDMI x 2
6. DisplayPort

7. Earphone

DISPLAY

Display Size (in.):	27
Viewable Area (in.):	27
Panel Type:	IPS Technology
Resolution:	2560 x 1440
Resolution Type:	QHD
Static Contrast Ratio:	1,000:1 (typ)
Dynamic Contrast Ratio:	80M:1
Light Source:	LED
Brightness:	350 cd/m ² (typ)
Colors:	1.07B
Color Space Support:	10 bit (8 bit + FRC)
Aspect Ratio:	16:9
Response Time (MPRT):	1ms
Viewing Angles:	178° horizontal, 178° vertical
Backlight Life (Hours):	30000 Hrs (Min)
Curvature:	Flat
Refresh Rate (Hz):	144
Adaptive Sync:	FreeSync
Blue Light Filter:	Yes
Flicker-Free:	Yes
Color Gamut:	DCI-P3: 96% size (Typ), NTSC: 93% size (Typ), sRGB: 131% size (Typ)
Pixel Size:	0.233 mm (H) x 0.233 mm (V)
Surface Treatment:	Anti-Glare, Hard Coating (3H)

COMPATIBILITY

PC Resolution (max):	2560x1440
Mac® Resolution (max):	2560x1440
PC Operating System:	Windows 7/8/8.1/10 certified; macOS tested
Mac® Resolution (min):	2560x1440

CONNECTOR

3.5mm Audio Out:	1
HDMI 2.0:	2
DisplayPort:	1
Power in:	3-pin Socket (IEC C14 / CEE22)

AUDIO

Internal Speakers:	2Watts x2
--------------------	-----------

POWER

Eco Mode (Conserve):	21W
Eco Mode (optimized):	28W
Consumption (typical):	34W
Consumption (max):	51W
Voltage:	AC 100-240V, 50/60 Hz
Stand-by:	0.5W
Power Supply:	Internal

ADDITIONAL HARDWARE

Kensington Lock Slot:	1
Cable Organization:	Yes

CONTROLS

Physical Controls:	Key 1 (favorite), Key 2, Key 3, Key 4, Key 5, Key 6 (power)
On Screen Display:	Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu

OPERATING CONDITIONS

Temperature:	32°F to 104°F (0°C to 40°C)
Humidity (non-condensing):	20% to 90%

WALL MOUNT

VESA Compatible:	100 x 100 mm
------------------	--------------

INPUT SIGNAL

Frequency Horizontal:	15 ~ 255KHz
Frequency Vertical:	48 ~ 144Hz

VIDEO INPUT

Digital Sync:	TMDS - HDMI (v2.0), PCI-E - DisplayPort (v1.2)
---------------	--

ERGONOMICS

Height Adjust (mm):	120
Swivel:	90°
Tilt (Forward/Back):	-5° / 20°
Pivot (Right/Left):	90° / 0°

WEIGHT (IMPERIAL)

Net (lbs):	16.8
Net Without Stand (lbs):	9.7
Gross (lbs):	20.9

WEIGHT (METRIC)

Net (kg):	7.6
Net Without Stand (kg):	4.4
Gross (kg):	9.5

DIMENSIONS (IMPERIAL) (WXHxD)

Packaging (in.):	29.1 x 17.6 x 7.5
Physical (in.):	24.1 x 17.08~21.3 x 9.4
Physical Without Stand (in.):	24.1 x 14.5 x 2.2

DIMENSIONS (METRIC) (WXHxD)

Packaging (mm):	738 x 448 x 191
Physical (mm):	613 x 433.9~541.1 x 239
Physical Without Stand (mm):	613 x 368 x 55

GENERAL

Regulations:	cTUVus, FCC-B, ICES003, CEC, MX-CoC, Mexico Energy, CE, CE EMC, CB, RoHS, ErP, REACH, WEEE, EAC, UkrSEPRO, BSMI, RCM, VCCI, PSE
PACKAGE CONTENTS:	XG2705-2K x1, 3-pin Plug (IEC C13 / CEE22) x1, DisplayPort Cable (v1.2; Male-Male) x1, Quick Start Guide x1
Recycle/Disposal:	Please dispose of in accordance with local, state or federal laws.
Warranty:	*Warranty offered may differ from market to market