




TD-9412M

1.3 Megapixel Network IR Water-proof
Bullet Camera


1.3 Megapixel Network IR Water-proof Bullet Camera

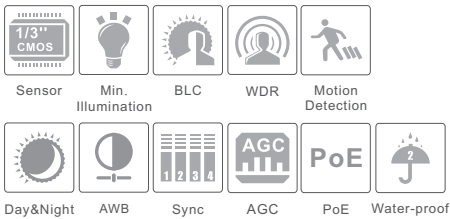

Features

- 960P full real time coding,
- Max .resolution:1280 x 960
- 20-30m IR night view distance
- 3D DNR, digital WDR, defog and image stabilization
- Corridor mode optional
- ROI coding
- Broadband audio capture up to 192KHz for providing more details to track events
- CVBS local video, one-way audio, PoE
- ICR auto switch, true day / night
- Support smart phone, iPad, remote monitoring
- NAT traversal

Dimensions

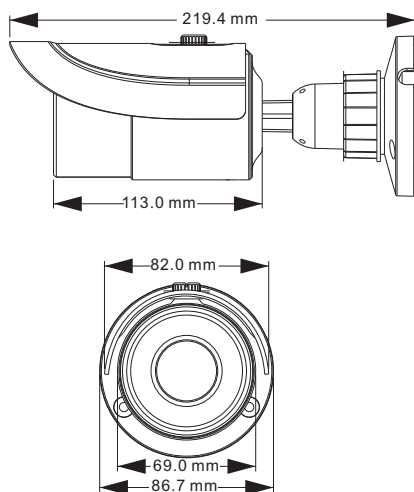

Specifications

| Specifications | Model | TD-9412M-D/IR2 | TD-9412M-D/PE/IR2 | TD-9412M-D/FZ/PE/IR2 |
|-----------------------|------------------------------------------------------------------------------------------------------|----------------|-------------------|----------------------|
| Camera | | | | |
| Image Sensor | 1/3"CMOS | | | |
| Image Size | 1280 x 960 | | | |
| Electronic Shutter | 1/25s~1/100000s | | | |
| Min. Illumination | 0LUX(IR LED ON) | | | |
| Lens | 6mm(4mm,8mm optional) | | 3.3mm~12mm | |
| Lens Mount | M12 | | Φ14 | |
| Wide Dynamic Range | Digital WDR | | | |
| Digital NR | 3D DNR | | | |
| Image | | | | |
| Video Compression | H.264 | | | |
| Resolution | 960P(1280 x 960), 720P(1280x720), VGA(640x480), QVGA(320x240) | | | |
| Multi-stream | 1280 x 960(1~30fps) / 1280x720(1~ 30fps) 1280x720(1~10fps) / 640x480(1~ 30fps) / 320x240(1~30fps) | | | |
| Bit rate | 64Kbps ~ 4Mbps | | | |
| Encode Mode | VBR/CBR | | | |
| Quality | Five levels under VBR; Freely adjustable under CBR | | | |
| Image Settings | Saturation, Brightness, Contrast, etc. adjustable through client software or web browser | | | |
| Audio Compression | G711A | | | |
| Interfaces | | | | |
| Network | RJ45 | | | |
| Audio | One-way audio(MIC IN x1) | | | |
| Functions | | | | |
| Remote Monitoring | IE browsing,CMS remote control | | | |
| Online Connection | Support simultaneous monitoring for up to 4 users ; Support multi-stream real time transmission | | | |
| Protocol | TCP/IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP,FTP | | | |
| Storage | Network remote storage | | | |
| Smart Alarm | Motion Alarm | | | |
| Day&Night | ICR | | | |
| PoE | NO | Yes | | |
| IR Distance | 20-30m | | | |
| Water-proof | IP66 | | | |
| Others | | | | |
| Power Supply | DC12V | DC12V/POE | | |
| Operating Environment | -40°C~50°C,10%~90% humidity | | | |
| Dimensions | Φ87mm×219mm | | | |
| Weight (net) | 635g | | | |