




TD-9515M

1.3 Megapixel Network IR Water-proof
Dome Camera


1.3 Megapixel Network IR Water-proof Dome Camera

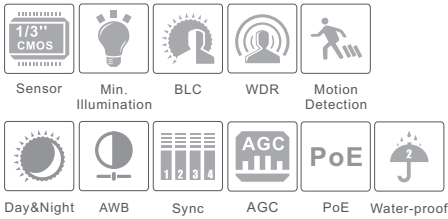

Features

- 960P full real time coding
- Max resolution:1280x960
- 20-30m IR night view distance
- 3D DNR, digital WDR, defog and image stabilization
- Corridor mode optional
- ROI coding
- Broadband audio capture up to 192KHz for providing more details to track events
- CVBS local video, one-way audio, PoE
- ICR auto switch, true day / night
- Support smart phone, iPad, remote monitoring
- NAT traversal

Dimensions

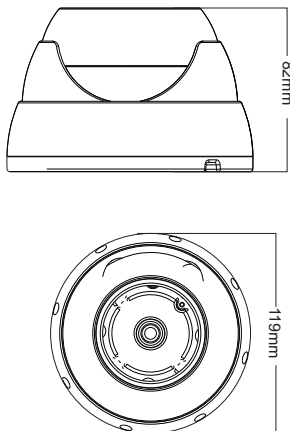

Specifications

Model	TD-9515M-D/PE/IR2	TD-9515M-D/FZ/PE/IR2
Specifications		
Camera		
Image Sensor	1/3"CMOS	
Image Size	1280x960	
Electronic Shutter	1/25s~1/10000s	
Min. Illumination	0LUX(IR LED ON)	
Lens	6mm(4mm,8mm optional)	3.3mm~12mm
Lens Mount	CS	Φ14
Wide Dynamic Range	Digital WDR	
Digital NR	3D DNR	
Image		
Video Compression	H.264	
Resolution	960P(1280x960), 720P(1280x720), VGA(640x480), QVGA(320x240)	
Multi-stream	1280x960(1~30fps) / 1280x720(1~30fps) 1280x720(1~10fps) / 640x480(1~30fps) / 320x240(1~30fps)	
Bit rate	64Kbps ~ 4Mbps	
Encode Mode	VBR/CBR	
Quality	Five levels under VBR; Freely adjustable under CBR	
Image Settings	Saturation, Brightness, Contrast, etc. adjustable through client software or web browser	
Audio Compression	G711A	
Interfaces		
Network	RJ45	
Video Output	BNC×1	
Audio	One-way audio(MIC IN x1)	
Functions		
Remote Monitoring	IE browsing,CMS remote control	
Online Connection	Support simultaneous monitoring for up to 6 users ; Support multi-stream real time transmission	
Protocol	TCP/IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP,FTP	
Storage	Network remote storage	
Smart Alarm	Motion Alarm	
Day&Night	ICR	
PoE	Yes	
IR Distance	20-30m	
Water-proof	IP66	
Others		
Power Supply	DC12V/POE	
Power Consumption	2.2W	
IR ON	4.72W	
Operating Environment	-40°C~50°C,10% ~90% humidity	
Dimensions	Φ119mm×82mm	
Weight (net)	669g	
Weight (gross)	763g	